
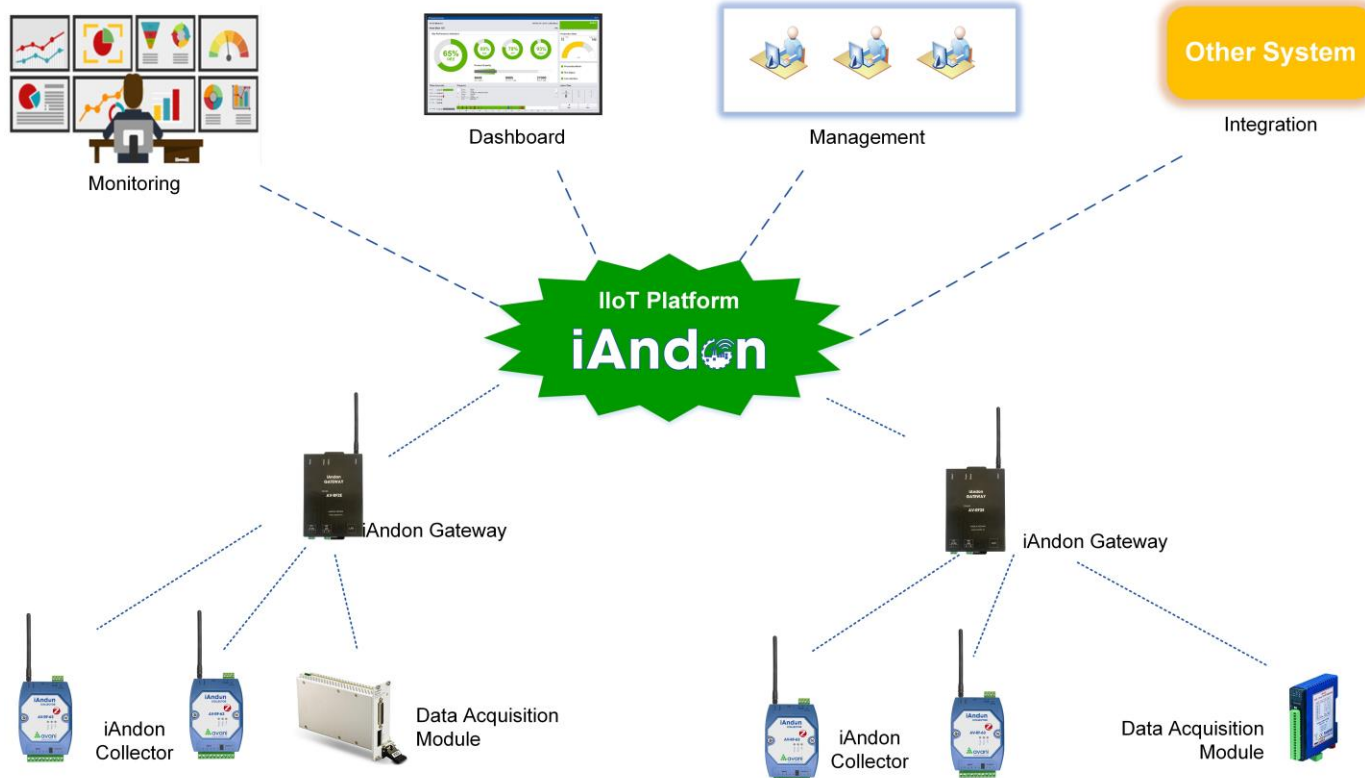


# iAndon Gateway AV-RF2E

- ✓ Wireless communication with ZigBee
- ✓ Communicate range up to 100m
- ✓ Manage up to 31 nodes
- ✓ Modbus RTU, TCP protocol
- ✓ Ethernet and Wi-Fi optional
- ✓ Small, compact, easy to install or replace

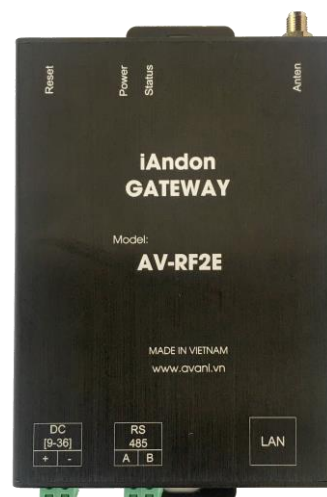

## Specifications

<b>Power</b>		<b>Input</b>	
Input	[9-36] VDC - 1A Max	Input type	ZigBee/RS485
Max Consumption	1W Max.	Input frequency	2.45GHz
Protect	Protection against reverse	<b>Output</b>	
<b>Physical Design</b>		Output type	Ethernet
Weight	240gr	Output speed	100 Mbps
Dimension	95 x 85 x 35 (mm)	<b>Node Manage</b>	
Installation	Screw mounting	Number of nodes	Up to 31
Cover material	Aluminum	Request node	Modbus Poll, TCP
<b>Environment</b>		Remote node	Command
Operation Temperature	-25 ~ +75°C	Reset node	Yes
Storage Temperature	-30 ~ +80°C	<b>Interface</b>	
Humidity	10 ~ 95% RH	USB	RS485
			Ethernet